

Save Space and
Reduce Noise with
Dura-Door Blastroom
Rubber Doors.





Dura-Door

Dura-Doors are made from a 6mm thick tough wear resistant SBR rubber to provide years of trouble free service against rebounding abrasive. The specially developed lamination process ensures it is completely safe and impossible to break and fall down.

Dura-Doors will save valuable factory space required for steel swing doors and the rubber absorbs noise to reduce the sound levels from the blasting nozzle.

To ensure dust does not leak from the door into surrounding work areas, the sides of the door are fitted with specially formed steel channels to provide tight sealing.

Door can be stopped at any position and drive automatically cuts off upon opening or closing. Manual drive nut is fitted to the drive to allow emergency operation of the door in case of power failure.

Dura-Doors are available in widths up to 12 meters wide and produced from a variety of colours, standard is black.

Dura-Door Fabrication Facility




Rotary limit switch for precise stopping




Electrical Control Panel



Dust Free Side Seals

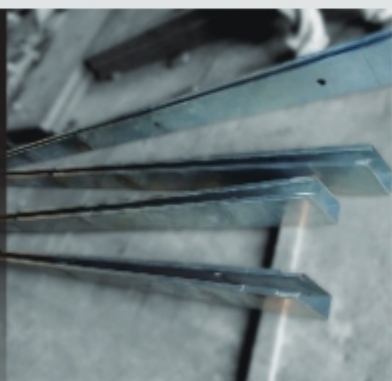

Easy Installation

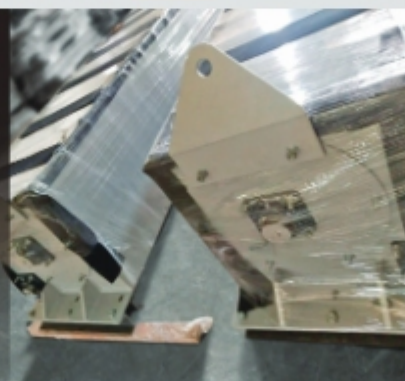

Blasttechnik Pte Ltd
2 Jurong East Street 21
#04-20 IMM Building
Singapore 609601
Tel. +65 8811 1883 | H/P. +65 9850 0121

www.dura-door.com | sales@blasttechnik.com

